


PRINTED COPY IS UNCONTROLLED

CAM DWELL WEAR PLATES

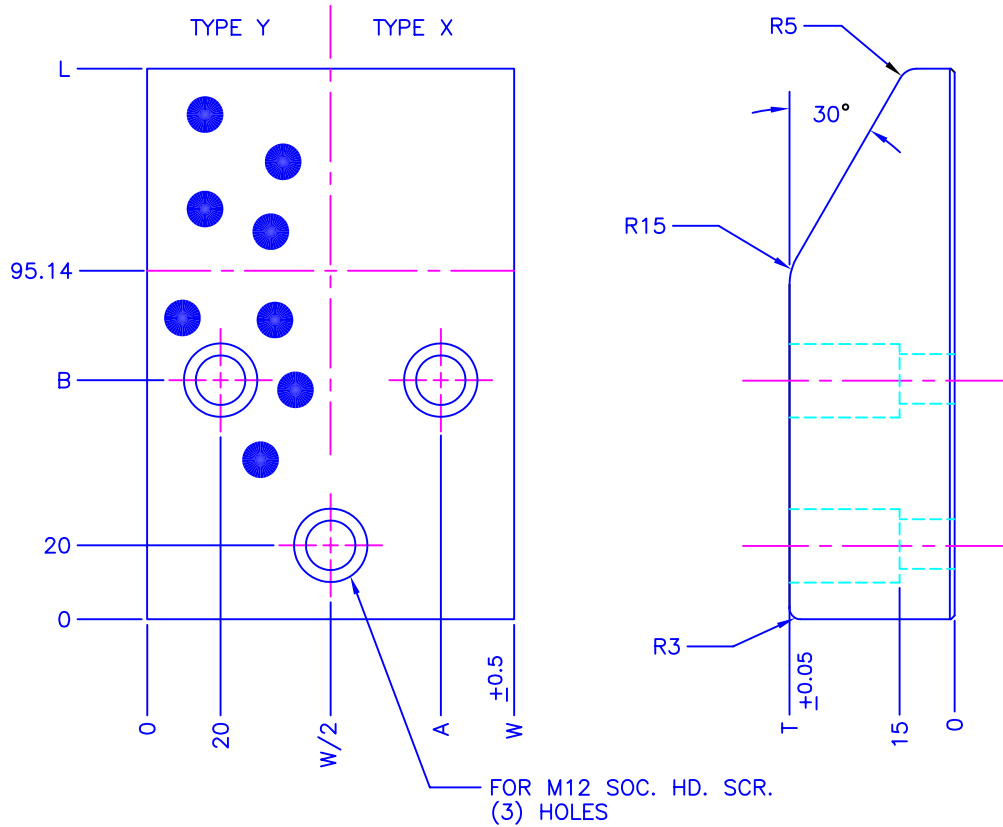

TOLERANCE BETWEEN SCREW HOLES ±0.25

TYPE Y ALUMINUM BRONZE WITH GRAPHITE PLUGS		TYPE X STEEL WITHOUT GRAPHITE PLUGS						
JOLICO NO.	GMGDS REF. NO.	JOLICO NO.	GMGDS REF. NO.	W	L	T	A	B
J-442260-Y	90.75.10-30100Y	J-442260-X	90.75.10-30100X	100	125	30	80	70
J-442261-Y	90.75.10-30125Y	J-442261-X	90.75.10-30125X	125	125	30	105	70
J-442266-Y	90.75.10-30160Y	J-442266-X	90.75.10-30160X	160	125	30	140	70
J-442262-Y	90.75.10-45100Y	J-442262-X	90.75.10-45100X	100	150	45	80	65
J-442263-Y	90.75.10-45125Y	J-442263-X	90.75.10-45125X	125	150	45	105	65
J-442267-Y	90.75.10-45160Y	J-442267-X	90.75.10-45160X	160	150	45	140	65
J-442264-Y	90.75.10-60100Y	J-442264-X	90.75.10-60100X	100	170	60	80	65
J-442265-Y	90.75.10-60125Y	J-442265-X	90.75.10-60125X	125	170	60	105	65
J-442268-Y	90.75.10-60160Y	J-442268-X	90.75.10-60160X	160	170	60	140	65