


JOLICO J-B TOOL

PRINTED COPY IS UNCONTROLLED

BRONZE CAM GIB "L" SHAPE

10 REAM
2 PLACES

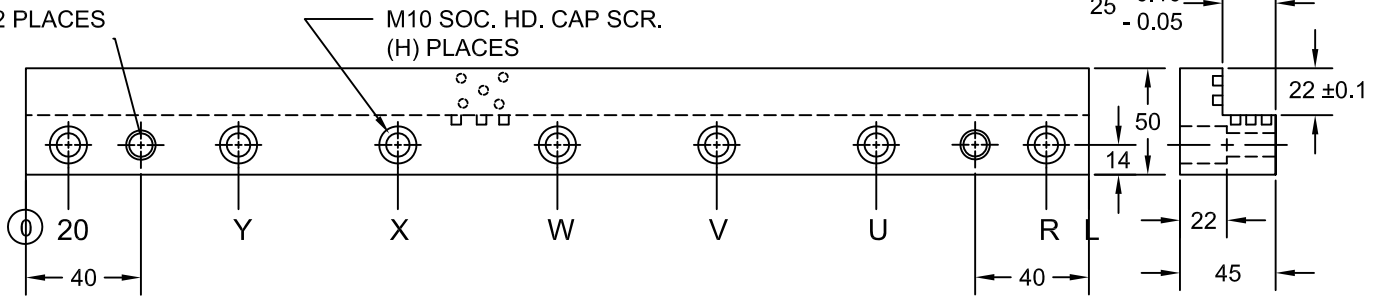


TOLERANCE BETWEEN SCREW HOLES ± 0.12

JOLICO NUMBER	GMGDS CODE NUMBER	L	H HOLES	Y	X	W	V	U	R
J - 336000	90.75.66 - A200	200	4	75	125	180	--	--	--
J - 336001	90.75.66 - A250	250	4	90	160	230	--	--	--
J - 336002	90.75.66 - A300	300	5	85	150	215	280	--	--
J - 336003	90.75.66 - A350	350	5	100	175	250	330	--	--
J - 336004	90.75.66 - A400	400	6	95	165	235	305	380	--
J - 336005	90.75.66 - A500	500	7	100	175	250	325	400	480


GIB TYPE "A"

10 REAM
2 PLACES

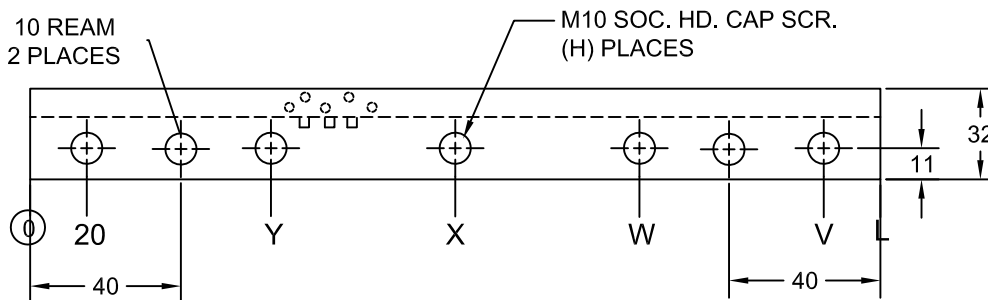


TOLERANCE BETWEEN SCREW HOLES ± 0.12

JOLICO NUMBER	GMGDS CODE NUMBER	L	H HOLES	Y	X	W	V
J - 336006	90.75.66 - B150	150	3	75	130	--	--
J - 336007	90.75.66 - B250	250	4	90	160	230	--
J - 336008	90.75.66 - B300	300	5	85	150	215	280




GIB TYPE "B"

12 REAM
2 PLACES

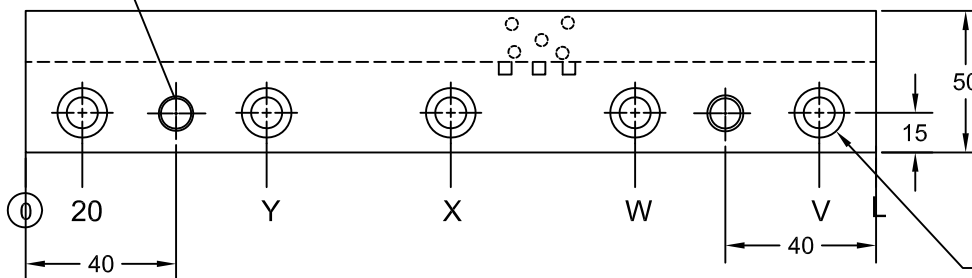

TOLERANCE BETWEEN SCREW HOLES ± 0.12

JOLICO NUMBER	GMGDS CODE NUMBER	L	H HOLES	Y	X	W	V
J - 336009	90.75.66 - C200	200	4	75	125	180	--
J - 336010	90.75.66 - C250	250	4	90	160	230	--
J - 336011	90.75.66 - C300	300	5	85	150	215	280



M12 SOC. HD. CAP SCR.
(H) PLACES

GIB TYPE "C"