REVERSED DIE PAD RETAINERS

PRINTED COPY IS UNCONTROLLED

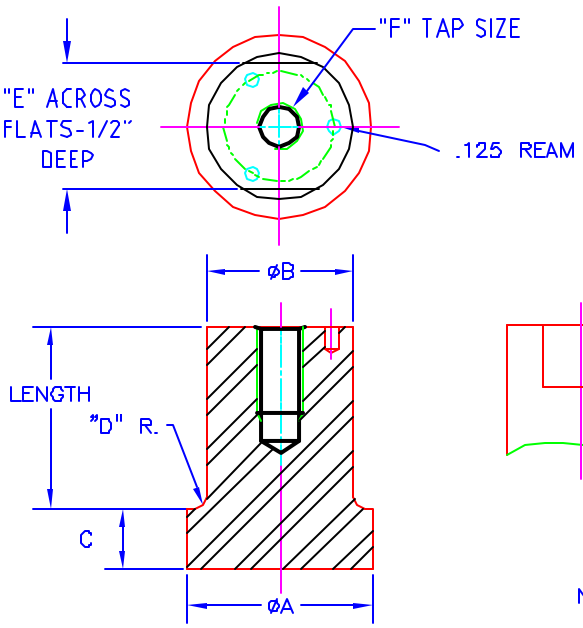





INDENT PIN

TWO TIMES THE SCALE OF THE MATING DETAILS

"V" LOAD HOLDING VALUE IN POUNDS.

NOTE: WILL CROSS-REFERENCE, QUOTE AND MANUFACTURE ALL SPECIAL PAD RETAINERS UPON REQUEST.

INDENT PINS, INCLUDED IN ASSEMBLY.

LENGTH	A = 1.06 B = .81 C = 0.38 D = 0.03 E = 11/16 F = 5/16-18 V = 900	A = 1.25 B = 1.00 C = 0.50 D = 0.03 E = 7/8 F = 3/8-16 V = 1,400	A = 1.62 B = 1.25 C = 0.50 D = 0.06 E = 1-1/8 F = 1/2-13 V = 2,600	A = 1.87 B = 1.50 C=0.50 D = 0.06 E = 1-1/4 F = 5/8-11 V = 4,000	A = 2.00 B = 1.62 C=0.50 D = 0.06 E = 1-3/8 F = 3/4-10 V = 5,800
1.00	J-51010-R *	J-61010-R			
1.25	J-51011-R *	J-61011-R	J-61111-R		
1.50	J-51012-R *	J-61012-R	J-61112-R	J-61212-R	
1.75	J-51013-R *	J-61013-R	J-61113-R	J-61213-R	J-61313-R
2.00	J-51020-R *	J-61020-R	J-61120-R	J-61220-R	J-61320-R
2.25	J-51021-R *	J-61021-R	J-61121-R	J-61221-R	J-61321-R
2.50	J-51022-R *	J-61022-R	J-61122-R	J-61222-R	J-61322-R
2.75	J-51023-R *	J-61023-R	J-61123-R	J-61223-R	J-61323-R
3.00	J-51030-R *	J-61030-R	J-61130-R	J-61230-R	J-61330-R
3.25	J-51031-R *	J-61031-R	J-61131-R	J-61231-R	J-61331-R
3.50	J-51032-R *	J-61032-R	J-61132-R	J-61232-R	J-61332-R
3.75		J-61033-R	J-61133-R	J-61233-R	J-61333-R
4.00		J-61040-R	J-61140-R	J-61240-R	J-61340-R
4.50		J-61042-R	J-61142-R	J-61242-R	J-61342-R
5.00		J-61050-R	J-61150-R	J-61250-R	J-61350-R
5.50		J-61052-R	J-61152-R	J-61252-R	J-61352-R
6.00		J-61060-R	J-61160-R	J-61260-R	J-61360-R

ORDER EXAMPLE J-61313-R

* INDENT PINS NOT INCLUDED WITH ASSEMBLY.